

# ACROLINK®

7N Cu INTERCONNECT CABLE SERIES  
Stressfree® 99.99999% Purity Copper

## 7N-A2050 Leggenda

### INTERCONNECT CABLE RCA




### Cable materials & Specifications

Cable diameter	: 8.0mm
Conductor	: 7N Cu D.U.C.C Stressfree 0.18mm×34 strands (AWG 18)
Insulation	: Polyethylene resin
Shielding	: Copper foil tape + 4N5 OFC (Horizontally wined)
Outer sleeve	: UV resistant Polyurethane resin
Conductor resistance	: 17mΩ/m
Electrostatic capacitance	: 87pF/m

### RCA connector specification

Center contact pin	: Hollow shaped Tellurium copper
Negative side contact part	: Deoxidized Phosphor copper
Plating	: Rhodium plating
Cover	: Aluminum + Carbon fiber

Standard length of 7N-A2050 Leggenda series are 0.6m • 1.0m • 1.5m.  
Special length order available.

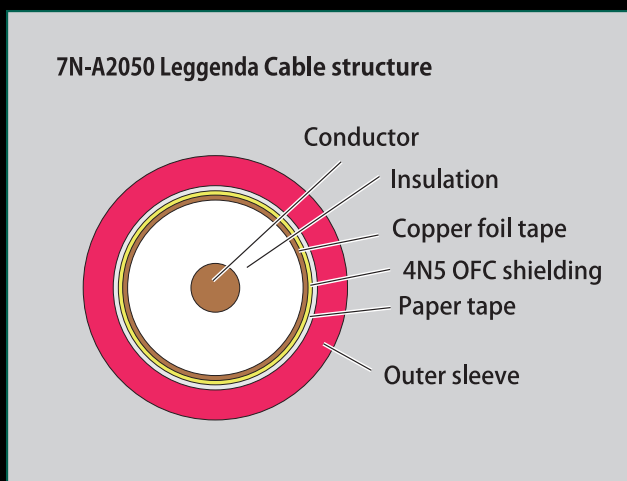

D.U.C.C stands for Dia Ultra Crystallized Copper which is specifically developed copper wire for high-end audio cables. D.U.C.C has controlled crystal structure and the minimized transmission loss. Patent technology and registered trade mark of Mitsubishi Materials LTD.